



For Earth, For Life
Kubota

XMS

KUBOTA FIELD SPRAYERS XMS210/213/216/218 XFT211

Field sprayers with a working width from 15 up to 30m



A NEW STANDARD IN S

KUBOTA XMS210/213/216/218 and XFT211



PRAYING



The XMS mounted sprayer is developed with focus on user friendliness and environmental protection. In combination with the XFT front tank it offers much more than just extra tank volume.

SELECT THE RIGHT MO

KUBOTA XFT211



Comfort version - manual control panel

**Pro version - electrical control panel
(ISOBUS compatible)**



DEL

KUBOTA XMS210/213/216/218

HOSA 15m aluminium spray boom



HC 18/20/21/24/27/28/30m steel spray booms



MAKE YOUR LIFE EASY

EASY HITCH




*Gravity point close to the tractor
for an optimal weight transfer*

The Easy Hitch for the XMS sprayer makes life simple for you:

- 1 Enough space to connect the PTO shaft and the hydraulic and electric cables.
- 2 Drive backwards to connect to the sprayer.
- 3 Lift up the sprayer.
- 4 An ingenious locking system secures the machine and shows the operator it has connected correctly.
- 5 Push in the storing legs and the sprayer is ready to go!

A parking frame is available for easy storage of the sprayer.

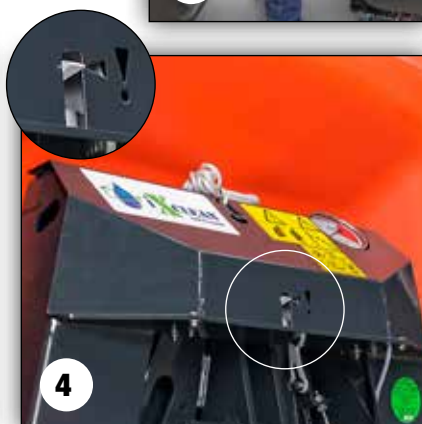

WITH THE XMS SPRAYER

EASY SET CONTROL PANEL



4-Position suction valve:

Position: main tank, clean water tank, suction hose and drain.

3-Additional pressure valves:

Functions: Tank cleaning nozzle, external cleaning (optional), liquid transfer (optional).

4-Position pressure valve:

Position: filling main tank, spraying, Turbo agitation (optional), additional functions.



The Easy Set valve panel makes life easy by its intuitive operation. The controls are separated to a suction and a pressure side. The valves are well protected behind the door; this keeps your operational area free of dirt and pesticides.



Full integration concept:

Nobody would expect all these functions so easily to hand. Better protection and integration is simply not possible!

XMS FOR EASY ACCESS



Filtration system:

Both suction and pressure filters are easy accessible for inspection and any subsequent cleaning, ensuring minimal contact with pesticide. The high capacity suction filter, filters the complete flow before the liquid enters the pump.

The self cleaning pressure filter prevents blocking via a continuous flow keeping the filter mesh clean. The undissolved particles are returned into the tank until they are completely dispersed.



Self cleaning pressure filter



Transparant suction filter housing

Tank lid for filling or inspection:

The fully integrated step and handgrips allow safe access to the tank lid even on the 1800 liter tank.



IXCLEAN COMFORT AND PRO



Electrical level indicator

An electrical level indicator provides actual tank volume to a spraying computer as well as via the external display on the valve panel.

The new silent piston diaphragm pumps

Pumps are available with capacities of 150, 200 and 260 L/min. Liquid fertiliser resistant and capable of running dry without damage.



iXclean Comfort

iXclean Comfort is a semi-automatic valve control system. The combination of an electrical level indicator and suction valve provides operator comfort and accuracy; automatic filling stops when the programmed level is reached, and remote control of all ENFO rinsing and priming functions are carried out from the cab! Simply prime the spray lines before you start and rinse them afterwards or even during an unexpected weather break, without having to leave the cab! ENFO is included as part of the standard specification of all Vicon sprayers.



iXclean Pro

Advanced solutions come from iXclean Pro, with fully automatic, electric valve management on ISOBUS sprayers. It means all functions can be controlled from the cab. Switching between filling, agitation, spraying, diluting, priming, rinsing and tank cleaning, is extremely easy: just push the button! In addition to auto filling, iXclean Pro offers also a fully automatic multi-step rinsing and cleaning program for the entire sprayer. Pushing one button a comprehensive cleaning process including all lines too starts, that takes just a few minutes and uses minimal amounts of clean water. It is so thorough, that residue levels after automated cleaning, are below 1%. iXclean Pro for filling or cleaning: making every litre count!



iXclean Pro screen
IsoMatch Tellus GO / IsoMatch Tellus



SAFE, CLEAN AND EASY



Chemical inductor:

The graduated chemical inductor with a capacity of 20 litres is mounted on rails and fully integrated in the frame. In storage position the inductor is sealed against the top plate and no cover is needed. The rotating canister cleaning nozzle releases the water when pushed downwards. The circular rinsing system is no add on: it is part of the design!



18 litre hand wash tank:

Everything is available to keep your hands clean. A storage place for gloves, liquid soap and the hand wash tank itself is integrated in the door. To prevent contamination, washings can be caught in the chemical inductor hopper.



PUT THE TURBO IN THE TANK!

The standard return flow agitation with its unique agitation tube is keeps the tank mixture agitated. To empty the main tank completely it can be electrically switched off during spraying.

The turbo agitation system (optional) allows powerful mixing during preparation of the mixture. This is especially helpful when powders are used or after sedimentation during a longer period of interruption. The entire pump flow is used to power 6 injector nozzles.

Y FILLING



180 liter clean water tank

The sprayer can be cleaned in the field with water from the clean water tank. Easy access to fill the tank via the opening in the cover.

Clean cloth locker

The clean cloth locker, which is integrated in the clean water tank, allowing you to keep your safety and cleaning equipment or tools with you on the sprayer.



Filling via the suction hose

External aspirated water is filtered first by the filter on the hose and then by the suction filter. In parallel you can already use the chemical inductor to add and premix chemicals. An optional anti return valve avoids return flow to the water source.

Hydrant filling

The optional 2 inch hydrant filling device allows filling under pressure at high capacity.

Outside cleaning set

15 m of hose, a brush with insert for soap, all linked to the pressure side of the pump, allow cleaning in the field with water from the 180 litre clean water tank.

WITH CARE FOR THE ENVIRONMENT

SPRAYER TEST HALL FOR TOP QUALITY



A certified test crew is testing every XMF and XFT, and of course all other sprayers, leaving the factory in our own test hall to meet the latest environmental regulations. Our testers are certified for all of the following test procedures.



NSTS:

National Sprayer Testing Scheme is the relevant authority in UK for sprayer homologation.



JKI:

Official homologation for Germany, delivered by the Federal Biological Research Centre of Germany, now JKI Institute.



SKL:

Official homologation for Benelux, delivered by the SKL foundation for agricultural machinery in Wageningen.



NY:

Official homologation for Norway, delivered by the Norwegian Food and Safety Authority.

ENTAM:

Homologation is in process. ENTAM is the European Network for Testing Agricultural Machines. JKI of Germany and Cemagref of France are among others, official members of ENTAM.

Environmental FOCUS: ENFO priming and rinsing system is standard on all our spray computers

This smart technology optimizes filling and cleaning of the spray lines. Accurate application, no waste of chemicals and saving water are the benefits for you and your environment.



Automatic Priming of spray lines:

before spraying starts the spray lines are filled with chemicals exactly up to the nozzle by automatic section shut off. This means no waste of chemicals and accurate application from the first moment!

Automatic Rinsing of spray lines:

after finishing or interruption, the pesticides are automatically flushed out of the spray lines. This means using up to the last litre of mixture and rinsing the spray lines with a minimum of clean water consumption.

ENVIRONMENT

EC AND FMC



Remote Control EC :

- All in one remote control
- Spraying on/off functions including up to 7 sections and two boarder nozzle switches
- Agitation shut off
- Pressure control
- Pre-select hydraulic boom functions



FlowMate Control FMC:

- Basic spray computer
- Extremely simple to operate
- Very compact by integration of all spraying and hydraulic functions
- Controlling the unique ENFO functions
- Integrated nozzle advice
- Field memory for 25 different fields

ISOMATCH TELLUS GO

The IsoMatch Tellus GO is a Universal ISOBUS Terminal. This multifunctional one-screen terminal has been developed for fast and simple control of any ISOBUS implement, giving the farmer a 'custom made' experience as it suits all needs for simple and efficient handling of farming machinery and tasks.

- Multifunctional one-screen Terminal with 7" touch screen
- Fast and simple implement control via touch screen, rotary button and hard keys or additional joystick
- Display of all relevant machine status information like speed, working width and application rate
- Application includes Manual Guidance, coverage logs and documentation of task data like: working time, machine specific total: i.e. total hectares, kg's of fertiliser, litres of spray liquid, number of bales, etc and additional detail such as farm, operator, field, machine, etc
- Support for external variable rate systems
- 2x USB 2.0 connections
- Camera input
- Diagnostic and service info



Additional functionality via the GEOcontrol application:

- IsoMatch GEO-SC: Automatic Section Control
- IsoMatch GEO-VR: Automatic Variable Rate via prescription maps

ISOMATCH TELLUS



The IsoMatch Tellus is your powerful platform for precision farming applications and future growth.

The IsoMatch Tellus is the first Universal Terminal with the capability to view and operate 2 different ISOBUS interfaces at once. This allows direct control of 2 implements at the same time, use GEOcontrol or display a camera view, without switching screens.

- Two ISOBUS interface screens
- Large 12.1" colour touch screen
- Intuitive operation
- Basic DOC registration program to save operational information directly to USB
- Four USB slots for quick data exchange (e.g. ISO-XML field maps, PDF), wireless USB stick or USB to serial cable for additional sensors
- Built in PDF reader: store and read any PDF document such as operator manuals
- RS232 connection for GPS receivers or sensors
- Internet connection via a wireless USB stick or router
- Integrated web browser



Switchbox

Operates spray and boom functions by intuitive layout for maximum comfort and short reaction times.



The Kubota M7001 series are ISOBUS 11783 compatible. This means that the sprayer can be plugged directly into the tractor and where available be operated via the K-monitor without any other separate terminal.

BRINGS CLEAR BENEFITS



IsoMatch GEOcontrol

IsoMatch GEOcontrol is an additional software application within the IsoMatch Tellus that helps you to control all ISOBUS compatible Kubota machines such as sprayers, spreaders and seeders! Combined with a GPS receiver it fulfils the future needs in terms of easy, smart and efficient farming. Easy operation and driver comfort due to the automatic implement control. You can stay focused on driving, while IsoMatch GEOcontrol lightens the workload. Reduced overlap and redundant tracks results in increased quality of work and efficiency by cost savings in time, fuel, fertiliser, pesticides and seeds.

Section control

Automatic switching on and off implement sections on headlands, boundaries and already covered areas to minimise overlap.

Variable rate control

Automatically adjusts the implement application rate based on input from the field prescription.

Documentation

Saves all operational job data and field maps for exchange via USB to farm management information systems.

Manual guidance

- Advised driving position using guidance lines (straight, curved or combined) in the field and on headlands
- Extendable using the optional IsoMatch InLine light bar, to place guidance in line of sight
- Smart boundary recording: independent from the working width, even without any implement corrected
- Boundary shrinking: create new inner boundaries by setting the desired width of the headland
- Manual guidance for all operations, includes non-electric or non-ISOBUS implements. e.g. cultivators, mowers, tedders etc.
- Headland control: create headland boundary and headland guidance lines tedders etc.

ISOMATCH GEOcontrol

- Easy and comfort of operation, due to not having to manually switch on or off sections or change the application rate. You can focus 100% on the driving in the field.
- More efficient work and avoiding overlap leads to cost savings of 5-10% on e.g. fertiliser, pesticides and seed. Better growing conditions and the increased yield.
- With IsoMatch GEOcontrol, working at night time becomes very easy. IsoMatch GEOcontrol reduces the workload considerably.



FUTURE BECOMES REALITY

STARGUIDE IV



Starguide IV: Automatic GPS section control and guidance by D-GPS

Those who have used it will never go back. Starguide IV will change your spraying days forever: spray around the headland and the Starguide IV will control the spray sections automatically as you cover the remainder of the field. Starguide IV is easy to operate: after spraying a field boundary the overlap and headland management are controlled for the rest of the field! Overlap and headland management are controlled for the rest of the field!

In addition the Starguide IV also includes the following features:

- Easy to operate, intuitive 5.7" colour touch screen
- Field view with covered areas and overlap
- Single and double overlap in different colours
- GPS status warnings
- USB slot for data export in different formats
- RXA-30 antenna



The Starguide IV enables you:

- Spraying in the dark
- Accurate spraying by full overlap control
- Increased operator comfort
- Cost savings by reduced overlap




MAINTAIN THE BOOM HEIGHT

BOOM GUIDE



Boom Guide is our automatic boom height control system that helps you to maintain your chosen spraying height. Ultrasonic sensors control the sprayer's hydraulics to guide the boom over the crop canopy or soil surface. This unique sensor technology provides excellent guidance in many different and challenging field conditions, making it easier for the operator to stay focussed on spraying.

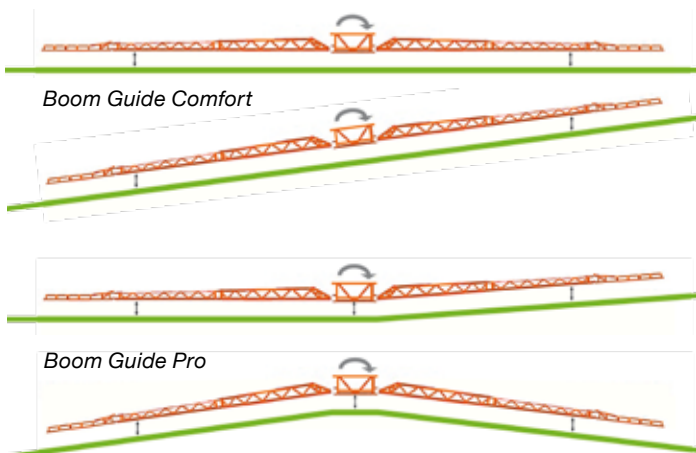

Boom Guide Comfort

The two ultrasonic sensors on the boom can control the spray height via the central slope correction and boom lift functions. This cost-effective system is suited to gentle slopes, uneven crop conditions and lower driving speeds.

Advantages of Boom Guide:

- Less drift: more constant and correct nozzle height
- Increased capacity: allows faster spraying speeds, also in the dark
- Driver comfort: less fatigue with easier focus on spraying
- Integrated ErgoDrive functionality: automatic lifting and lowering on headland turns
- Crop and Soil mode selection: closely follow the top of a closed canopy or of follow the soil surface in an uneven, open canopy or row crop situation
- Safe transport: ultrasonic sensor automatically fold with boom in its transport position
- ISOBUS compatible: easy plug and play operation with ISOBUS compatible (tractor) terminals

Boom Guide Pro

This advanced system uses three ultrasonic sensors to control left- and right-hand boom sections independently for the ultimate guidance in the most challenging field conditions. It can deliver positive and negative lateral movement on each side of the boom to follow the contours in every condition!

SO MUCH MORE THAN



XFT Comfort and XFT Pro

The XFT front tank is available in two different versions. The XFT211 Comfort with manual control of the EasySet control panel on the XMS sprayer as well as the control panel of the XFT. The second version is the XFT211 Pro.

This is the ISOBUS version of the front tank, the operator gets full control over all functions from the tractor seat including automatic level management. Front and rear tanks will then be emptied in equal proportion for optimum weight distribution.



Valve panel XFT Comfort



Valve panel XFT Pro

Easy to Fit, Simple to Unhitch

The XFT211 front tank uses the functions of the XMS sprayer when filling and spraying. This avoids the need - or additional cost - for a separate induction hopper or spray pump for the front tank. All the necessary controls are conveniently located on the sprayer and are operated from the EasySet valve panel on the XMS. Without a front PTO shaft or hydraulic hoses, hitching and unhitching the XFT is extremely simple: it uses only two hoses with KAMlock connections and an electrical cable - it really is that simple!



Easy to Fit, Simple to Unhitch

JUST EXTRA VOLUME



Multi-Tank-Management

The innovative XFT concept offers much more than just extra tank volume.

In combination with the XMS mounted sprayer, the XFT211 front tank provides a total volume of around 3000 litres, making the XMS-XFT combination a serious alternative to a self propelled sprayer. With tractors able to carry much higher loads on their rear linkages, the need for ballast weight on the front of the tractor is essential. With a nominal volume of more than 1100 litres, the XFT211 is that front end weight, adding stability to your tractor, but only when needed. The XFT concept with combined functions gives you more flexibility: you can easily select which tank you would like to use from the tractor cab while spraying.

- One-tank approach: both tanks are filled with spray liquid it boosts overall tank capacity by 60% (automatic level system).
- Two-tank approach: filled with two different tank mixes, the front and rear tanks can be used as two independent spray tanks.
- Reservoir approach: filled with clean water or a concentrated product the XFT front tank can be used as a reservoir for later use, for example in another field or crop.



Optimal visibility from the tractor cab in all situations

INNOVATION TO MAKE



HOSA BOOM

The HOSA is a unique boom having an advanced Z-folding principle: the lateral movement enables you to quickly reduce boom width and pass obstacles in the field. The aluminium profile is designed for maximum resistance. No welding provides remarkable strength, the anodised hardened surface protects against scratches and corrosion.

- Z-folding aluminium boom
- One-side spraying possible
- 2,50m transport width
- Heavy construction, light weight
- Profile integrated nozzle protection
- Smooth surface for easy cleaning
- Monojets or Trijets
- Central locking of pendulum system

HOSA 15 5 sections



HOSA 15 5 sections v1



HOSA 15 7 sections



LIFE EASY



One side spraying



Transport locking



Hydraulic locking pendulum system



Safety tip-end



MADE FOR HIGH SPEED




HC BOOM



The HC boom is a multi-talented boom. The triangular steel construction and the unique anti yaw system allow high speed even in very difficult conditions.

Multiple folding possibilities:

The HC boom is giving you the functionalities for one side folding, symmetrical reduction and asymmetrical reduction depending of the choice for the electric hydraulic command.

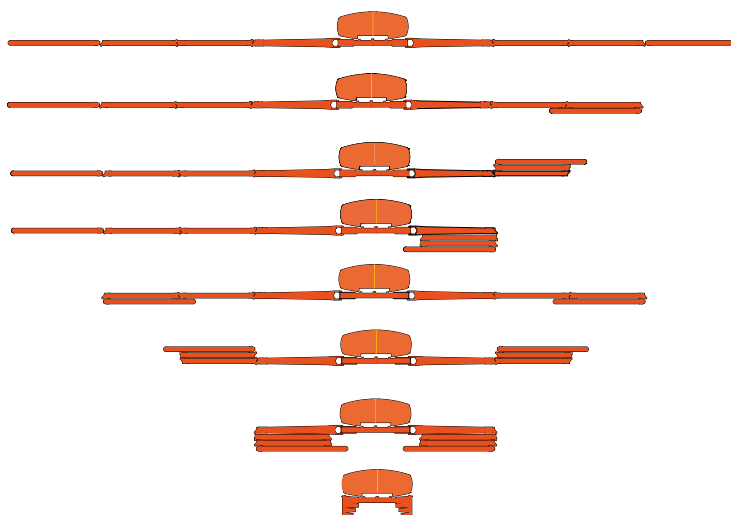



Safe on the road

The 2.50 m transport width means that even narrow roads and gateways are no obstacle.



THE VERSATILE BOOM

HC BOOM



HC boom (m)	Sections	Section deviation
18	5	6-9-6-9-6
18	7	5-5-6-4-6-5-5
20	5	8-8-8-8-8
20	7	5-6-6-6-6-6-5
20	7	4-4-8-8-8-4-4
20	9	4-4-4-6-4-6-4-4-4
21	5	9-8-8-8-9
21	7	6-6-6-6-6-6-6
21	7	7-7-5-4-5-7-7
21	9	5-4-4-6-4-6-4-4-5
24	7	6-6-9-6-9-6-6
24	9	6-5-5-6-4-6-5-5-6
27	7	6-9-9-6-9-9-6
27	9	6-6-6-6-6-6-6-6-6
28	7	8-8-8-8-8-8-8
28	9	4-6-6-9-6-9-6-6-4
28	9	7-6-6-6-6-6-6-6-7
30	9	6-6-6-8-6-8-6-6-6



Special bottom profile for full nozzle integration and protection.




Anti yaw system for independent damping left/right for smooth boom behaviour.




Safety tip-end


HC 18 5 sections




HC 18 7 sections




HC 20 5 sections




HC 20 7 sections




HC 20 7 sections




HC 20 9 sections




HC 21 5 sections




HC 21 7 sections




HC 21 7 sections




HC 21 9 sections




HC 24 7 sections




HC 24 9 sections




HC 27 9 sections



HC 28 9 sections



HC 30 9 sections



TECHNICAL SPECIFICATIONS

MOUNTED SPRAYER MODELS	XMS210	XMS213	XMS216	XMS218
1. Tank size				
Nominal / maximum main tank capacity	1000 l / 1100 l	1300 l / 1450 l	1600 l / 1800 l	1800 l / 2000 l
Clean water tank / Hand wash tank	180 l / 18 l	180 l / 18 l	180 l / 18 l	180 l / 18 l
Chemical inductor with opening of 40x40 cm	30 l	30 l	30 l	30 l
2. Empty weight (total machine incl. boom)				
... with HOSA 15 m	1048 kg	1060 kg	1073 kg	1082 kg
... with HC 18 m	1371 kg	1383 kg	1396 kg	1405 kg
... with HC 20 m	1415 kg	1427 kg	1440 kg	1449 kg
... with HC 21 m	1421 kg	1433 kg	1446 kg	1455 kg
... with HC 24 m	1459 kg	1471 kg	1484 kg	1493 kg
... with HC 27 m	1619 kg	1633kg	1647 kg	1670 kg
... with HC 28 m	1634 kg	1648 kg	1662 kg	1675 kg
... with HC 30 m	1647 kg	1661 kg	1875 kg	1898 kg
3. Measurements				
Width (total machine incl. boom)	HOSA + HC = 2,50 m			
Height (total machine incl. boom)	HOSA = 2,85 m - HC = 3,30 m			
Length (total machine incl. boom)	HOSA + HC18 m = 1,45 m - HC20-24m = 1,65 m - HC27-30 m = 2,10 m			
4. Pumps				
Piston-diaphragm pump 150 l/min or 200 l/min or 260 l/min	▲ 150 or 200 or 260 l/min			
5. Electronics				
5.1. Remote control				
EC 5-section 3-way-valves, for pre-selection hydr. (incl. EC control box)	▲ ¹ not for HC			
5.2. Basic spray computer				
FMC 5-section 2-way-valves, for pre-selection hydraulics (incl. FMC control box)	▲ ²			
FMC 7-section 2-way-valves, for pre-selection hydraulics (incl. FMC control box)	▲ ³			
FMC 9-section 2-way-valves, for pre-selection hydraulics (incl. FMC control box)	▲ ⁴			
FMC 5-section 2-way-valves, for oilcircuit hydraulics (incl. FMC control box)	▲ ⁵			
FMC 7-section 2-way-valves, for oilcircuit hydraulics (incl. FMC control box)	▲ ⁶			
FMC 9-section 2-way-valves, for oilcircuit hydraulics (incl. FMC control box)	▲ ⁷			
5.3. ISOBUS electronics				
FMA 5-section 2-way-valves, for oilcircuit hydraulics ISOBUS (excl. control box)	▲ ⁸			
FMA 7-section 2-way-valves, for oilcircuit hydraulics ISOBUS (excl. control box)	▲ ⁹			
FMA 9-section 2-way-valves, for oilcircuit hydraulics ISOBUS (excl. control box)	▲ ¹⁰			
5.3.1. ISOBUS controls for ISOBUS electronics				
Switchbox	▲ ¹			
IsoMatch Tellus GO and Switchbox	▲ ²			
IsoMatch Tellus and Switchbox	▲ ³			
Joystick for IsoMatch Tellus and Switchbox	●			
6. Other basics				
Chemical inductor	▲			
PTO shaft 6-splines	▲			
Quick hitch, Frame stand, Clean water tank, Hand wash tank, Manometer, Mechanical level indicator, Tank inside cleaner, Drain (tank empty by gravity)	standard			
7. Options (factory fitted)				
Electrical level indicator	● only FMC/FMA electronic			
iXclean Comfort (incl. electrical level indicator)	● only FMC/FMA electronic			
iXclean Pro (incl. electrical level indicator)	● only FMA electronic			
Boom Guide Comfort or Pro (only possible in combination with FMA electronics)	● only FMA electronic			
8. Accessories (also loose available)				
TURBO agitation (high pressure agitator)	●			
Protection curtain	●			
Hydrant filling connection 2"	●			
Filling Hose 8m 2" (for sucking from external)	●			
Non return valve for Filling hose	●			
Float for Filling Hose	●			
Clean water tank filling connection 1" at Easy Set valve panel	●			
Outside cleaner	●			
Pump out connection	●			
Parking frame	●			
Battery cable 3 pin (only for EC/FMC, if no power connector at tractor)	●			
CAN extention cable 6m (only for FMC)	●			
Second quick hitch	●			
▲ ¹ - ▲ ¹⁰ - = one of these choices must be selected. ▲ = must be selected. ● = option, free to select				

TIONS

BOOMS	HOSA 15	HC 18 / 20 / 21 / 24	HC 27 / 28 / 30
1. Basic boom functionality			
Working width (maximum)	15 m	18 / 20 / 21 / 24 m	27 / 28 / 30 m
Material	Aluminium	Steel	Steel
Transport position	Vertical	Vertical	Vertical
Folding drive	Hydraulically	Hydraulically	Hydraulically
2. Spray sections			
Standard	5	5 / 7 / 7 / 7	9 / 9 / 9
Alternative 1 (two sections more than standard)	7	7 / 9 / 9 / 9	- / - / -
Alternative 2 (two sections less than standard)		5 / 5	7 / 7 / 7
3. Spray jets			
Monojets	▲ ¹	▲ ¹	▲ ¹
Trijets	▲ ²	▲ ²	▲ ²
Pentajets			▲ ³
4. Accessories (also loose available)			
Nozzle protection extension (recommended for injector nozzles)	Integrated	Integrated	Integrated
Road lights	●	●	●
▲ ¹ - ▲ ² - = one of these choices must be selected, ▲ = must be selected, ● = option, free to select			
FRONT TANK MODELS			
	XFT211 Comfort	XFT211 Pro	
Nominal tank capacity (l)	1100	1100	
Maximum tank capacity (l)	1300	1300	
Clean water tank capacity (l)	2x65	2x65	
Empty weight (kg)	221	223	
Front linkage	Cat II		
12V electrical pump capacity (l/min)	25 (for cleaning & agitation)		
Automatic agitation stop	Standard		
2 rotating cleaning nozzles	Standard		
2 injector nozzles for agitation	Standard		
Autonomous suction filter	Standard		
Level indicator	Mechanical	Electrical	
Control panel	Manual	Electrical (ISOBUS)	
Accessories (also loose available)			
Traffic lights	●	●	
Transport rollers	●	●	
Deflector decals	●	●	
IsoMatch Eye (camera)	-	●	
Compatibility on XMS with adaptation set			
FMC	●	●	
FMA-ISO (IsoMatch Tellus or Tellus GO)	●	●	
iXclean Comfort	●	●	
iXclean Pro	-	●	
▲ ¹ - ▲ ² - = one of these choices must be selected, ▲ = must be selected, ● = option, free to select			



The company reserves the right to change the above specifications without notice. This brochure is for descriptive purpose only. Some of the items pictured in this brochure are optional and not standard equipment. Please consult your local Kubota dealer for warranty, safety or product information. For your safety, Kubota strongly recommend the use of a seat belt in all applications.

©2015 Kverneland Group Nieuw-Vennep BV

